

Dynamic Engineers Inc.

Website: www.DynamicEngineers.com Email: lnquiry@DynamicEngineers.com

89∌, +, !‰ A<n FFHMHz Crystal Filter

Electrical Specifications

Center Frequency (Fo) 113 MHz
Passband Width @ -3 dB 10MHz min
Ripple 3 dB max
Insertion Loss 7 dB

Stopband Width - 60 dB min@ Fo +/-15MHz

- 8 dB min@ 107.1MHz - 16 dB min@ 106.1MHz - 44 dB min@ 103.1MHz

VSWR 2.5 Impedance Zin = Zout 50 Ohms Power Handling 1W

Operating Temperature


-40°C to +Ï 0°C

Mechanical Drawing & Pin Connections

Drawing No:

MD25000, -1

3

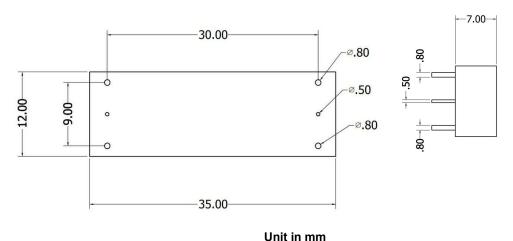

1mm = 0.0394 inches

Tolerance: +/- 0.2 mm