



### Electrical Specifications


Center Frequency (Fo)	132.4 MHz
Passband Width @ -3 dB	10MHz min
Ripple	1 dB max
Insertion Loss	5 dB max
Stopband Width	- 50 dB min@ Fo +/-15MHz
Power Handling	1 W
VSWR	1.5
Impedance Zin = Zout	50 Ohms

### Operating Temperature

-40°C to +70°C

### Mechanical Drawing & Pin Connections

Drawing No: MD25000, -1

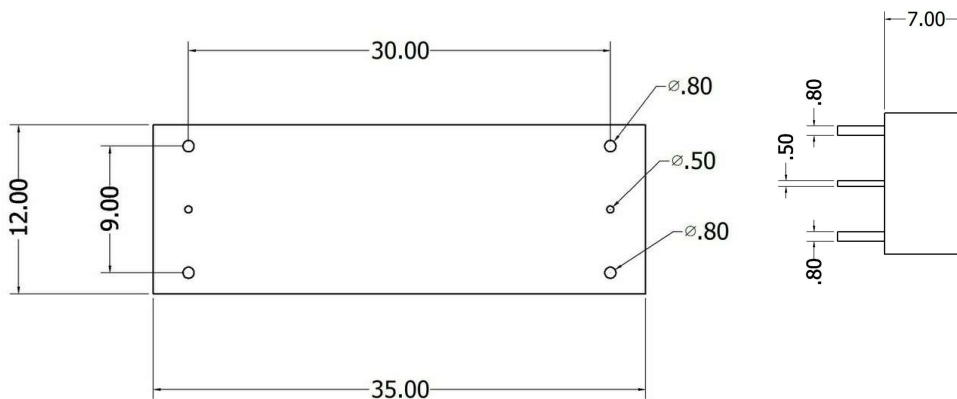

Unit in mm  
1mm = 0.0394 inches  
Tolerance: +/- 0.2 mm