



### Electrical Specifications


Center Frequency (Fo)	15.75MHz
Passband Width @ -3 dB	+/- 1.1 KHz min
Ripple	1 dB max
Insertion Loss	5 dB max
Stopband Width	60 dB min@ Fo +/-5KHz 80 dB min@ Fo +/-6KHz 80 dB min@ Fo +/-7KHz
Power Handling	0 dBm
Impedance Zin = Zout	100 Ohms

### Operating Temperature

-40°C to +70°C

### Mechanical Drawing & Pin Connections

Drawing No: M8 & \$\$\$ !%

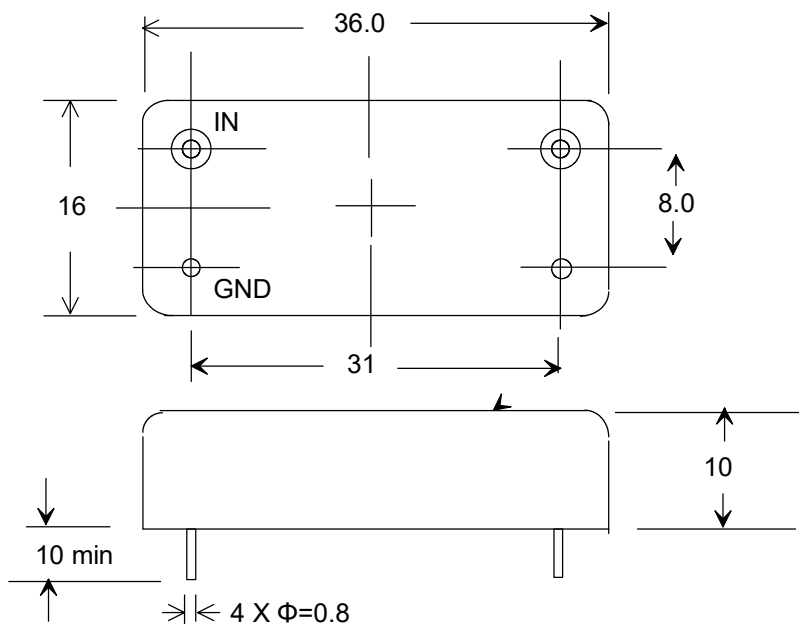

Unit in mm  
1mm = 0.0394 inches  
Tolerance : +/- 0.2 mm