




Features and Benefits

- Frequency range: 32MHz
- Supply voltage: 5V
- Steady current: 350mA Max
- Output waveform: Sinewave
- Frequency stability vs. operating temperature: ± 0.05 ppb
- Aging: ± 0.05 ppm per year
- Operating temperature: -30°C to $+70^{\circ}\text{C}$
- Size: 35.4x26.7x15.8mm
- Package type: Through hole

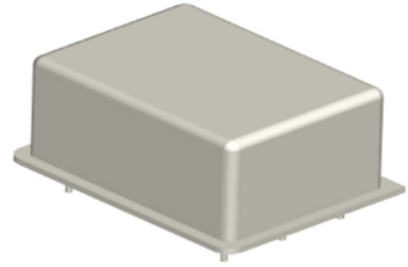


Typical Applications

- Wireless Communications
- Test equipment
- Synthesizers

Description

DOCXO3627CV-32MHz-B-V offers high frequency stability, good long-term aging and low phase noise, all in a compact package to suit the different communication needs.


Mechanical Drawing & Pin Connections

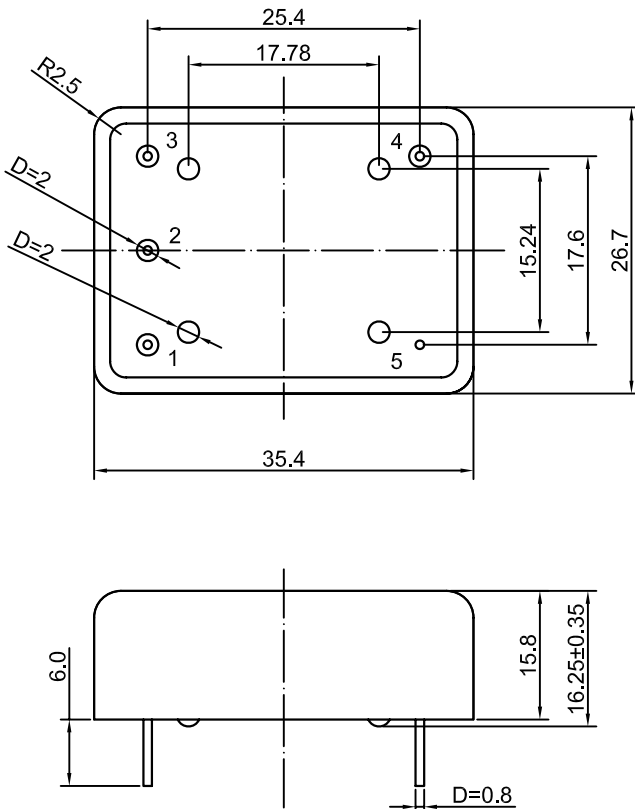

Drawing No: MD25000-1

Pin	Signal
1	Electrical tuning
2	Reference voltage
3	+V Supply
4	RF OUT
5	GND

Unit in mm
 1mm = 0.0394 inches

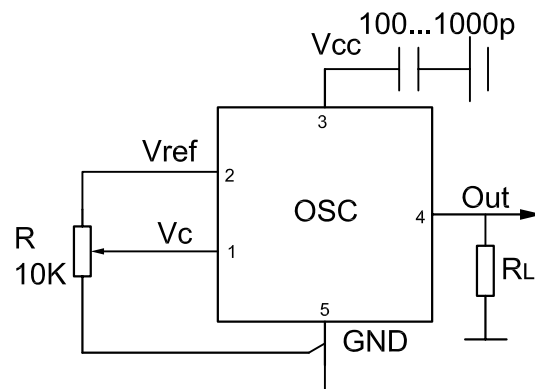



Specifications

Oscillator Specification	Sym	Condition	Value			Unit	Note
			Min.	Typ.	Max.		
Operational Frequency	f_0			32		MHz	
RF Output							
Signal Waveform			Sinewave				
Level			+7			dBm	note
Harmonics					-25	dBc	
Load			45	50	55	ohm	
Sub-harmonics level		$f_{SH}=f_0 \pm (n \cdot f_0 / 3)$ $n=1,2,3...$			-40	dBc	
Power Supply							
Reference Voltage	Vref		4	4.2	4.3	V	
Supply Voltage	Vcc		4.75	5	5.25	V	
Warm-up current		$V_{CC}=5V$			1300	mA	
Continuous current		at +25°C, $V_{CC}=5V$			350	mA	
Frequency warm-up time		to $df/f=1e-8$ at +25°C ref at 0.5 hour			300	sec	
Frequency Adjustment Range							
Electronic Frequency Control (EFC)	$(f_i - f)/f$	$V_c = 0V$			-0.3	ppm	note
	$(f - f)/f$	$V_c = V_{c0}$		0		ppm	
	$(f_H - f)/f$	$V_c = V_{ref}$	+0.3			ppm	note
EFC voltage	V_c		0		4.3	V	
Input impedance	R_{in}			11		Kohm	
Preset control voltage	V_{c0}	disconnected V_c pin	1.8	2.1	2.4	V	
Output resistance of Vref				91		ohm	
Frequency Stability							
Versus Operating Temperature Range		ref +25°C			±0.05	ppb	note
Initial Tolerance @ +25°C	$(f - f_0)/f_0$	$V_c = V_{c0}$	-0.1		+0.1	ppm	note
Versus supply voltage		ref V_{CC} typ.			±0.05	ppb	
Versus load		5% change			±0.05	ppb	
SSB Phase noise (Static. Values are for reference only and are subject to change.)		10Hz		-115		dBc/Hz	
		100Hz		-135			
		1KHz		-145			
		10KHz		-150			
		100KHz		-152			
Aging Per Day		After 30 days of operation			±0.5	ppb	
Aging 1 st Year					±0.05	ppm	
Maximum ratings, environmental, mechanical conditions							
Operating temperature range	-30°C to +70°C						
Storage temperature range	-60°C to +90°C						
Power voltage	-0.5 to 6 V						
Control voltage	-1.0 to 6 V						
Air flow velocity	0.5 m/s maximum						
Humidity	Hermetically sealed						
Mechanical shock	Per MIL-STD-202, 30G, 11ms						
Vibration	Per MIL-STD-202, 5G to 500Hz						
Soldering conditions	Hand solder only – not reflow compatible 260°C 10s (on pins)						
Washing conditions	Washing with water or alcohol based detergent allowed only with final enough drying stage						

Note: Included in the test data