



Features and Benefits


- Frequency Range:864-882MHz
- Supply Voltage:5.0V
- Current: 30mA Max.
- 3 wire serial Fractional PLL
- Output power: +5.0dBm Max.
- Phase noise: -109dBc/Hz@10KHz
- Operating temperature: -40°C--+85°C
- Size:15x15x3.7mm
- Package type: SMD

Typical Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

Mechanical Drawing & Pin Connections

Drawing No: MD2400*)-1

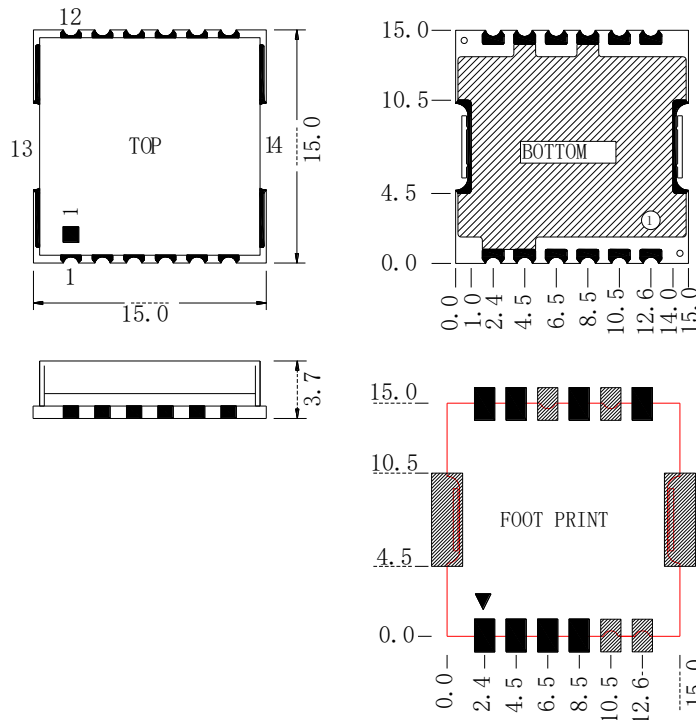

Pin Connections:

Pin	Function
1	CLK
2	DATA
3	LE
4	Ref. IN
5&6	GND
7	VCC(VCO)
8	GND
9	RF Out
10	GND
11	Lock Detect
12	Vcp(PLL)
13&14	GND

Unit in mm
1mm = 0.0394 inches



Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	864		882
Output Power	dBm	+1.0	+3.0	+5.0
Step Size	KHz		25	
Settling Time	msec		10	30
Output Impedance	Ω		50	
Phase Noise @1kHz offset	dBc / Hz		-85	-80
Phase Noise @10kHz offset	dBc / Hz		-109	-104
Phase Noise @100kHz offset	dBc / Hz		-131	-126
Phase Noise @1MHz offset	dBc / Hz		-149	-144
2nd Harmonic Suppression	dBc		-11	
Sideband Spurious Suppression	dBc			-80
Reference (input frequency)	MHz	5		100
Reference (input level)	dBm	-5		+5
VCO Power Supply (Vcc) Voltage	Vdc		5	
VCO Power Supply (Vcc) Current	mA		20	30
PLL Power Supply (Vcp) Voltage	Vdc		5	
PLL Power Supply (Vcp) Current	mA		5	10
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85