



### Features and Benefits


- Frequency Range: 2060-2070MHz
- Supply Voltage: 5.0V
- Current: 35mA Max.
- 3 wire serial Fractional PLL
- Output power: +2.0dBm Max.
- Phase noise: -109dBc/Hz@10KHz
- Operating temperature: -40°C--+85°C
- Size: 19.0x19.0x6mm
- Package type: SMD

### Typical Applications

- SATCOM radio link
- Point-to-Point radio
- Receiver
- MMDS
- Test Equipment
- WiMAX
- Radar

### Mechanical Drawing & Pin Connections

Drawing No: MD240074-1

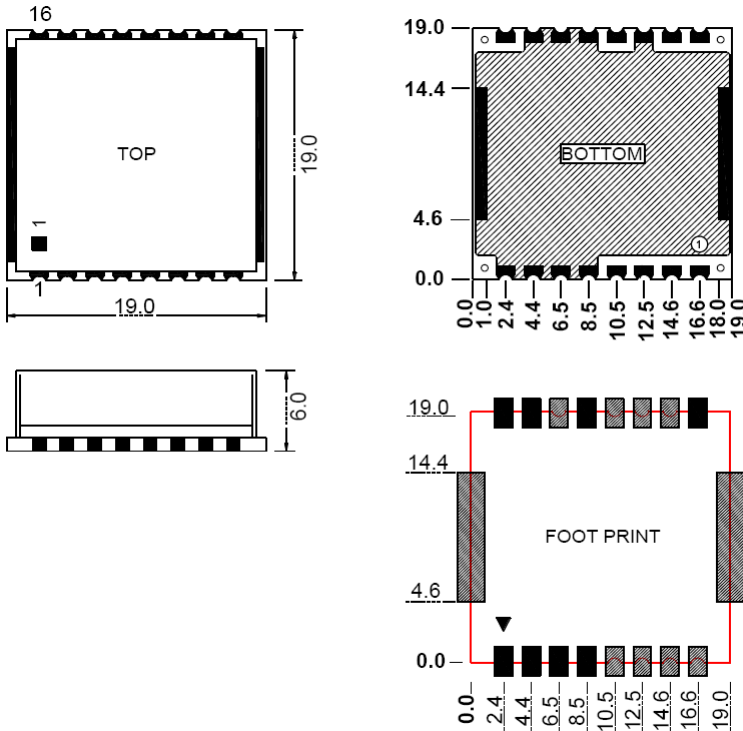

Pin Connections:

Pin	Function
1	CLK
2	DATA
3	LE
4	Ref. IN
5-8	GND
9	VCC(VCO)
10-12	GND
13	RF Out
14	GND
15	Vcp(PLL)
16	Lock Detect
17&18	GND

Unit in mm  
1mm = 0.0394 inches



## Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	2060		2070
Output Power	dBm	-2.0	0.0	+2.0
Step Size	KHz		125	
Settling Time	msec		10	30
Output Impedance	$\Omega$		50	
Phase Noise @1kHz offset	dBc / Hz		-76	-71
Phase Noise @10kHz offset	dBc / Hz		-109	-104
Phase Noise @100kHz offset	dBc / Hz		-130	-125
Phase Noise @1MHz offset	dBc / Hz		-150	-145
2nd Harmonic Suppression	dBc		-28	-20
Sideband Spurious Suppression	dBc			-80
Reference (input frequency)	MHz	5		100
Reference (input level)	dBm	-5		+5
VCO Power Supply (Vcc) Voltage	Vdc		5	
VCO Power Supply (Vcc) Current	mA		29	35
PLL Power Supply (Vcp) Voltage	Vdc		5	
PLL Power Supply (Vcp) Current	mA		5	10
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85