



Dynamic Engineers Inc.

2550 Gray Falls Dr., Suite#128, Houston, TX, 77077 USA
TEL: 1-281-870-8822 EMAIL: Sales@DynamicEng.com

D@@, - ' 6 E!GG!, ' &A <n!,) &A <n!5

832.5-852.5MHz SMD PLL Synthesizer

Features and Benefits




- Frequency Range:832.5-852.5MHz
- Supply Voltage:5.0V
- Current: 35mA Max.
- 3 wire serial integer PLL
- Output power: +7.0dBm Max.
- Phase noise: -110dBc/Hz@10KHz
- Operating temperature: -40°C--+85°C
- Size:9.8x9.3x2.3mm

Typical Applications

- Base station
- Cable TV
- Satellite Communications
- UHF radio link

Mechanical Drawing & Pin Connections

Drawing No: MD2400* \$-1

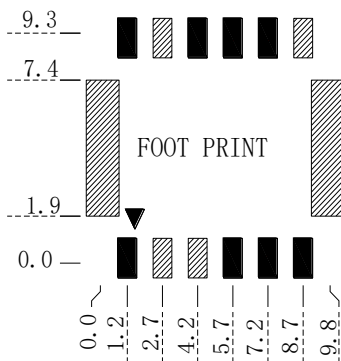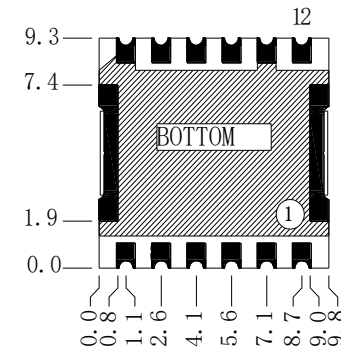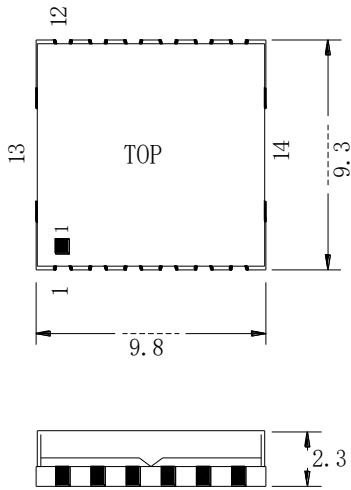

Pin Connections:

Pin	Function
1	Lock Detect
2&3	N.C.
4	Vcc(VCO)
5	Vcp(PLL)
6	RF Out
7	GND
8	LE
9	DATA
10	CLK
11	GND
12	Ref. In
13&14	GND

Unit in mm
1mm = 0.0394 inches



Specifications

Parameter	Units	Min.	Typical	Max.
Operating Frequency Range	MHz	832.5		852.5
Output Power	dBm	+3.0	+5.0	+7.0
Step Size	KHz		100	
Settling Time	msec		10	30
Output Impedance	Ω		50	
Phase Noise @1kHz offset	dBc / Hz		-77	-72
Phase Noise @10kHz offset	dBc / Hz		-110	-105
Phase Noise @100kHz offset	dBc / Hz		-131	-126
Phase Noise @1MHz offset	dBc / Hz		-151	-146
2nd Harmonic Suppression	dBc		-21	-15
Sideband Spurious Suppression	dBc			-80
Reference (input frequency)	MHz	5		40
Reference (input level)	dBm	-5		+5
VCO Power Supply (Vcc) Voltage	Vdc		5	
VCO Power Supply (Vcc) Current	mA		24	35
PLL Power Supply (Vcp) Voltage	Vdc		5	
PLL Power Supply (Vcp) Current	mA		5	10
Operating Temperature Range	$^{\circ}\text{C}$	-40		+85