

Dynamic Engineers Inc.

Website: www.DynamicEngineers.com Email: lnquiry@DynamicEngineers.com

SF3030AO-938MHz-A

938MHz Small Size SMD SAW Filter

Features and Benefits


Center frequency: 938MHz

I.L: 3.7dB Max.

Operating temperature: -30°C to +85°C

Size: 3x3x1.4mm

Package type: Surface Mount



Typical Applications


IOT Cellular Telecom 4G/LTE Wireless Communication WLAN Base Station Radar


Mechanical Drawing & Pin Connections

Drawing No:

2

MD240080-1

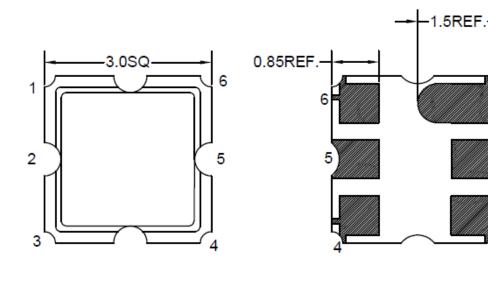



PIN	Function			
#2	INPUT			
#5	OUTPUT			
Others	GND			

Unit in mm

1mm = 0.0394 inches

Not Specified Tolerance: ±0.2mm



Dynamic Engineers Inc.

Website: www.DynamicEngineers.com Email: Inquiry@DynamicEngineers.com

SF3030AO-938MHz-A938MHz Small Size SMD SAW Filter

Specifications

Parameter		Min.	Typical	Max.	Units	
Center Frequency	Fc		938		MHz	
Insertion Loss (935~941 MHz)	IL		2.5	3.7	dB	
Amplitude Ripple (935~941 MHz)			0.2	1.4	dB	
VSWR (935~941 MHz)			1.5	2.2		
Attenuation (Reference level from 0 dB)						
40 ~ 400 MHz		40	63		dB	
700 ~ 850 MHz		20	52		dB	
893 ~ 910 MHz		15	50		dB	
965 ~ 983 MHz		25	49		dB	
1076 ~ 1092 MHz		45	51		dB	
1100 ~ 1600 MHz		45	48		dB	
1600 ~ 3000 MHz		30	33		dB	
Temperature Coefficient of Frequer	ncy		-36		ppm/K	
Input Power Level			16		dBm	
DC Voltage			3		V	
Operating Temperature Range		-30		+85	°C	
Storage Temperature Range		-40		+95	°C	